


# INCRA MITER GAUGE & MITER SLED COMPATIBILITY CHECKER

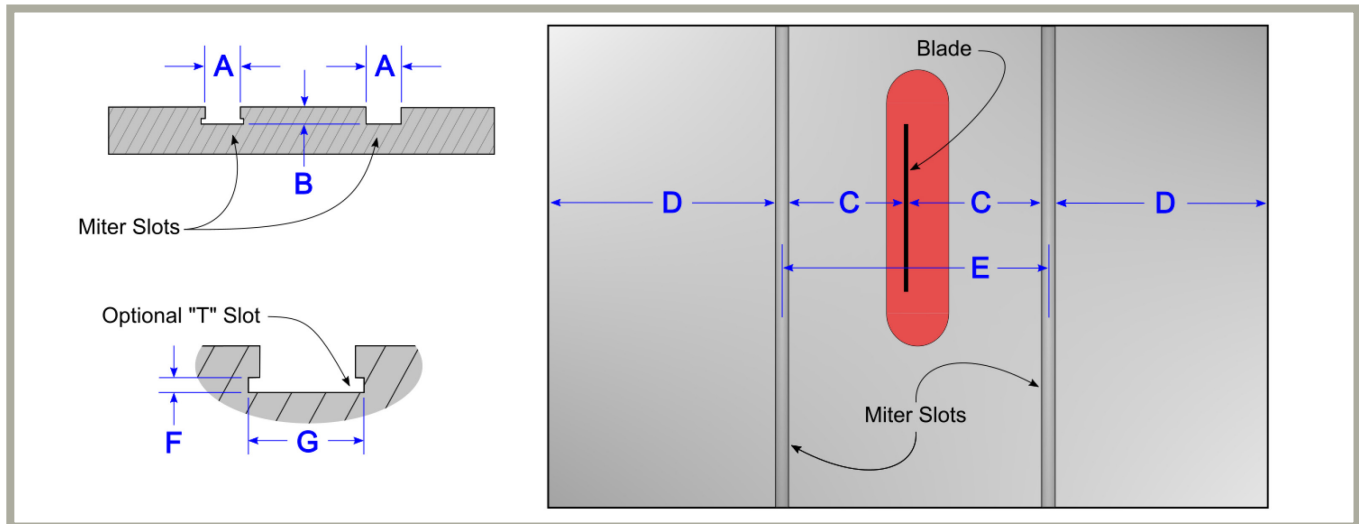

|                   | Miter Slot Width  | Miter Slot Depth                           | Blade Clearance           | Support Beyond Miter Slot  | Miter Slot Spacing        | Optional T-Slot Area                    |
|-------------------|---|--|---------------------------|----------------------------|---------------------------|---|
|                   | Dimension A   | Dimension B                                | Dimension C               | Dimension D                | Dimension E               | Dimension F - G                         |
| <br>MITER V27     | 3/4" Typical<br>Actual 0.740" - 0.766"<br>(18.8 mm - 19.4 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 3-1/4" (83 mm)<br>minimum | 3" (76 mm)<br>minimum      | N/A                       | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |
| <br>MITER V120    | 3/4" Typical<br>Actual 0.740" - 0.766"<br>(18.8 mm - 19.4 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 3-1/4" (83 mm)<br>minimum | 3" (76 mm)<br>minimum      | N/A                       | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |
| <br>MITER 1000    | 3/4" Typical<br>Actual 0.740" - 0.770"<br>(18.8 mm - 19.5 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 3-5/8" (92 mm)<br>minimum | 4-1/2" (114 mm)<br>minimum | N/A                       | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |
| <br>MITER 1000SE  | 3/4" Typical<br>Actual 0.740" - 0.770"<br>(18.8 mm - 19.5 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 3-5/8" (92 mm)<br>minimum | 6" (150 mm)<br>minimum     | N/A                       | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |
| <br>MITER 1000HD  | 3/4" Typical<br>Actual 0.740" - 0.770"<br>(18.8 mm - 19.5 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 3-5/8" (92 mm)<br>minimum | 6" (150 mm)<br>minimum     | N/A                       | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |
| <br>MITER 3000SE  | 3/4" Typical<br>Actual 0.740" - 0.770"<br>(18.8 mm - 19.5 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 3-5/8" (92 mm)<br>minimum | 7" (175 mm)<br>minimum     | N/A                       | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |
| <br>MITER EXPRESS | 3/4" Typical<br>Actual 0.740" - 0.766"<br>(18.8 mm - 19.4 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 2" (51 mm)<br>minimum     | 8" (203 mm)<br>minimum     | 14" (355 mm)<br>maximum   | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |
| <br>MITER 5000    | 3/4" Typical<br>Actual 0.740" - 0.770"<br>(18.8 mm - 19.5 mm) | 3/8" Typical<br>0.375" (9.5 mm)<br>minimum | 2-1/2" (64 mm)<br>minimum | 10" (254 mm)<br>minimum    | 12.5" (317 mm)<br>maximum | 1/8" H x 15/16" W<br>(3.2 mm x 23.8 mm) |