





MITER SLED COMPATIBILITY CHECKER

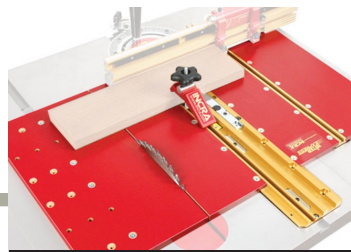


MITER EXPRESS



MITER 5000

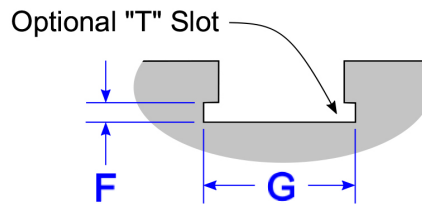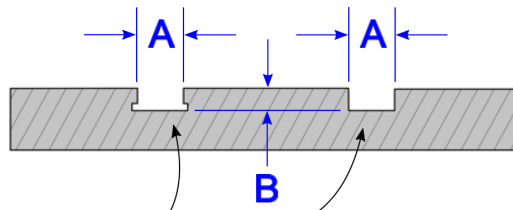

Miter Slots

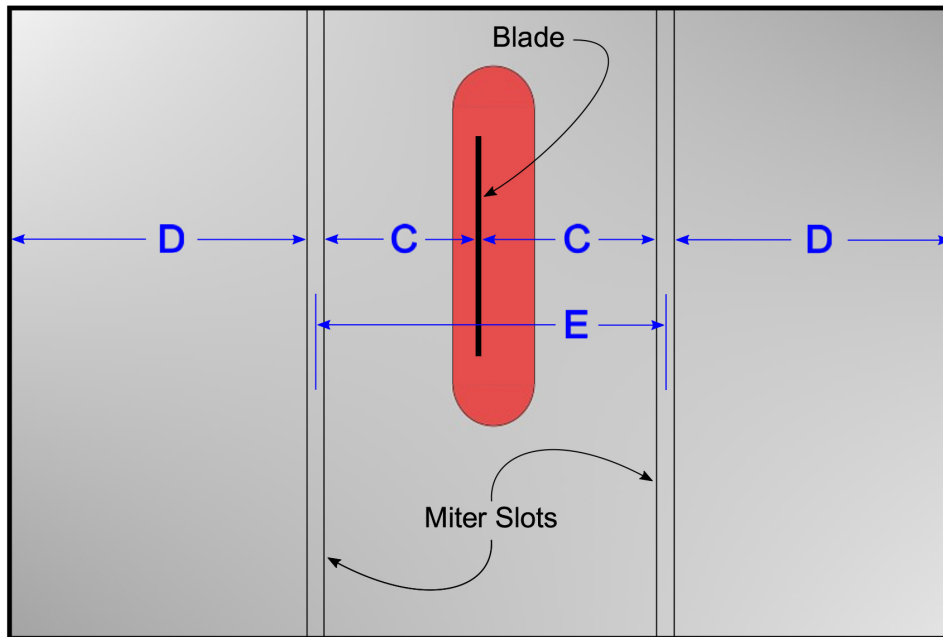

	Miter Slot Width	Miter Slot Depth	Blade Clearance	Support Beyond Miter Slot	Miter Slot Spacing	Optional T-Slot Area
	Dimension A	Dimension B	Dimension C	Dimension D	Dimension E	Dimension F - G
INCRA Miter Express Sled	3/4" Typical Actual 0.740" – 0.766" (18.8 mm – 19.4 mm)	3/8" Typical 0.375" (9.5 mm) minimum	2" (51 mm) minimum	8" (203 mm) minimum	14" (355 mm) maximum	1/8" H x 15/16" W (3.2 mm x 23.8 mm)
INCRA Miter 5000 Sled	3/4" Typical Actual 0.740" – 0.770" (18.8 mm – 19.4 mm)	3/8" Typical 0.375" (9.5 mm) minimum	2-1/2" (64 mm) minimum	10" (254 mm) minimum	12.5" (317 mm) maximum	1/8" H x 15/16" W (3.2 mm x 23.8 mm)

Manufactured by:
Taylor Design Group, Inc.
P.O. BOX 810262 Dallas, TX 75381
www.incra.com

INCRA is a Registered Trademark of Taylor Design Group
©2023 Taylor Design Group, Inc. Rev. 05/23

